


## Cat 5e Keystone Jacks

D-Link Category 5e keystone jacks are RJ45 8P 8C 50u jacks suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools. They are available in universal labels color coded for T568A and T568B wiring schemes and fit in high density keystone patch panel. It supports IEC 60603-7-4 and complied with ANSI/TIA/EIA-568-C.2 standard.

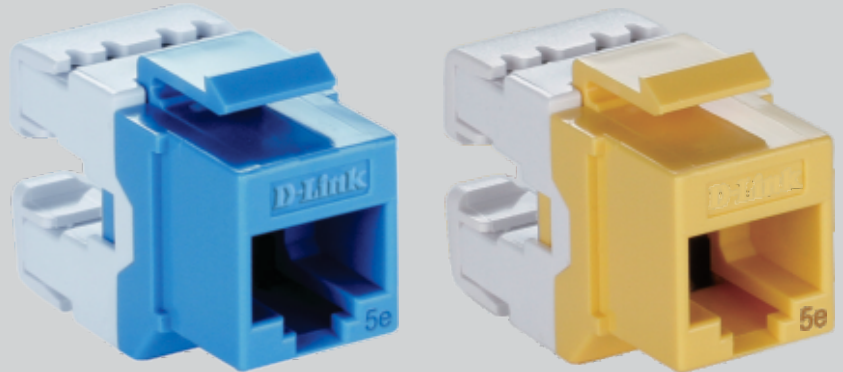

## SPECIFICATIONS

RJ45 Jack:	<b>Housing: ABS+PC, UL 94V-0, with optional color</b> <b>Contact Bracket: PC, UL 94V-2, transparent color</b>
RJ45 Jack Contact:	<b>Material-phosphor bronze with nickel plated</b> <b>Finish: 50 micro-inch gold plated on plug contact area</b>
IDC:	<b>Housing- PC + glass fiber, UL 94V-2</b> <b>Terminal: phosphor bronze with tin plated</b>
IDC CAP:	<b>ABS, UL 94V-0</b>
Insertion Cycles:	<b>750 times</b>
Insertion Force:	<b>20N (Max)</b>
Operating Temperature:	<b>-10°C to 60°C</b>
Storage Temperature:	<b>-10°C to 80°C</b>
Contact Resistance	
Variation:	<b>20 Milliohms</b>
Insulation Resistance:	<b>&gt; 100 Megaohms</b>

## ORDERING INFORMATION

CAT 5E Keystone Jacks		
Part Code	Description	Color Code
NKJ-5EWHI1B21	Cat5E UTP Keystone Jack	White
NKJ-5EBLU1B21	Cat5E UTP Keystone Jack	Blue
NKJ-5ERED1B21	Cat5E UTP Keystone Jack	Red
NKJ-5EGRN1B21	Cat5E UTP Keystone Jack	Green
NKJ-5EYEL1B21	Cat5E UTP Keystone Jack	Yellow



**D-Link (India) Limited**  
Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059  
Specifications are subject to change without notice.  
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners.  
©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)