


D-Link adopts high precision equipments in fiber connector product line providing the highest levels of reliability and performance. Each SC simplex optical fiber connector has a 2.5mm ceramic ferrule which is housed in a color coded polymer frame. Special design allow quick conversion to a duplex style connector by the use of a simple jointing clip.

Available in both Single mode-blue housing and Multi mode-beige housing, connectors come with a 900µm and 3mm strain relief boot. Good for use with pigtail and buffered fiber cables.

FEATURES

- High Precision Ceramic Ferrule
- High Precision Polymer housing
- Quick conversion to duplex with a joint clip
- Beige for Multi mode and Blue for Single mode
- APC Green Polymer housing with 900µm and 3mm strain relief boot

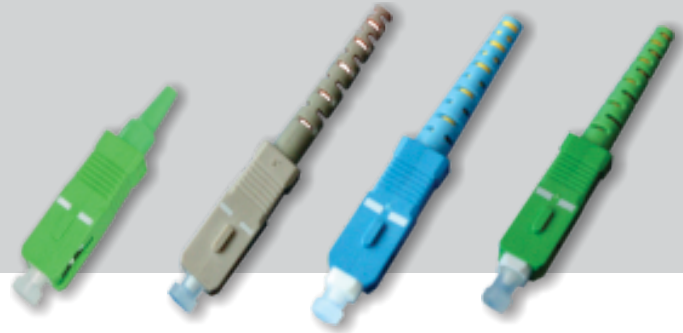

SPECIFICATIONS

Measure	SC Connector
Insertion Loss dB (Single and Multi Mode)	< 0.3
Return Loss	> 50dB UPC Style Ferrule > 60dB APC Style Ferrule
Pigtail Boot	900µm beige (Multi mode) blue (Single mode)
Cable Boot	3mm beige (Multi mode), blue (Single mode) 2mm upon request
Mating Cycle	Up to 1000 times
Ferrule Diameter	2.5mm ± 0.001
Ferrule Tolerance Single Mode	126 ± 0.5µm internal
Ferrule Tolerance Multi Mode	127 ± 0.5µm internal
Finish	Pre-radiused PC end, radius 10 to 25mm
Operating Temperature	- 40°C to + 85°C
Meet Standard	IEC61754-20 Optical Fiber Connector Interface
Durability	IEC61300-2-2 Fiber Optic Interconnecting Devices
Performance	IEC61753-1 Optical Fiber interconnecting devices and passive components performance standard

ORDERING INFORMATION:

NCO-FSSSC09	Connector SM SC type
NCO-FMSSC09	Connector MM SC type

D-Link (India) Limited
Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)