




DCS-F4624E

4.0MP MOTORIZED VARIFOCAL WDR OUTDOOR DAY & NIGHT DOME (H.265)

KEY FEATURES

- 1/3" Progressive Scan CMOS
- Motorized Lens 2.8-8mm
- 4MP@20fps, 3MP@30fps, 1080P@30fps
- Triple Streams
- Smart IR Range 10-15m
- Low bitrate, Excellent low light performance
- WDR, 3D DNR
- ROI, Defog, HLC, Corridor mode, DIS
- Compact Design

DIMENSION

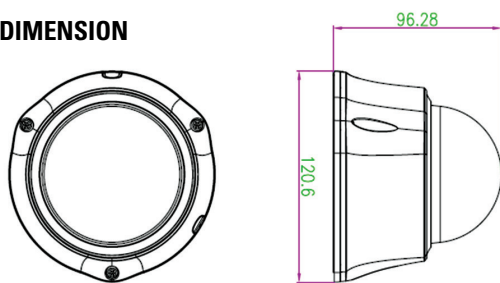

ACCESSORIES



CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.05Lux; IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	WDR >120dB
Digital Noise Reduction	2D/3D
Lens	Motorized Lens 2.8-8mm
FOV	90°~ 45°
IR LED	2pcs
IR Range	10-15m
IMAGE	
Video Compression	H.264/265, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb; Sub stream 100kb-6000kb
Audio Compression	G.711, RAW_PCM
Max.Resolution	2592*1520/2560*1440/20fps, 2304*1296/30fps, 1920x1080/30fps
Stream	Stream1 2592*1520/2560*1440/2304*1296/1920x1080 Stream 2 D1 to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection, Line Crossing, Tamper, Area Intrusion, Camera Move, Dwell, Multiple Dwell, Retrograde Detection, Object Left, Object Remove, Abnormal Speed, Illegal Parking, Network Disconnect, Disk alarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime/VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish
System Compatibility	Onvif, CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes, built-in
Audio I/O	1ch Audio In&1ch Audio Out
Alarm I/O	1ch Alarm In&1ch Alarm Out
RS485	Optional
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot, Max 128GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W(IR LED OFF) 7W IR LED ON
Operating Temperature	Starting Temperature: -30 °C~ 60 °C (-22°F ~ 140°F) Working Temperature: -40 °C ~ 60 °C (-40°F ~ 140°F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	120.6x96.28mm
Product Weight	700g